

Journal

The USA Journal of Applied Sciences



3

2018

 IBUNET

 ORT Publishing

The Usa Journal of Applied Sciences

#1 - 2018

Editor-in-chief:

Marina Savtchenko (Russia)

International editorial board:

Barbara Ferrell (USA)

Michael Scott (USA)

Cynthia Parham (USA)

Felix Mouser (USA)

Angelika Goldschmidt (Germany)

Dr.oec. Saida Bersirowa (Russia)

Dr.disc. pol. Alexej Kiseljov (Ukraine)

Dr.geo Ruslan Murakaev (Russia)

Editorial office:

CIBUNET Publishing

P.O. box 444

Woodlawn, NY 10470, USA

www.cibunet.com

Representative in Europe:

ORT Publishing

Schwieberdinger Str. 59

70435 Stuttgart, Germany

Tel.: +49(711)50432575

Fax: +49(711)50439868

info@ortpublishing.de

www.ortpublishing.de

The USA Journal of Applied Sciences is an international,
English/German/Russian/Ukrainian language, peer-reviewed journal
published semimonthly.

№ 1 2018 – 300 copies

Passed in press in May 2018

ISSN 2376-1342

© CIBUNET Publishing

© ORT Publishing

Siddikov Ilkhomjon

Head of the Department of "Power supply systems"
of Tashkent University of Information Technology, Uzbekistan,
e-mail: ikhsiddikov@mail.ru

Abubakirov Azizjan, Sarsenbaev Dauletbay

Assistant and Student of the chair "Power supply systems"
of Karakalpak State University, Uzbekistan,
e-mail: aziz1306@mail.ru, d.b.sarsenbaev@gmail.com

THE SOURCES OF ERRORS OF ELECTROMAGNETICS TRANSDUCERS

Abstract: On the bases of the given dimensions of magnetic system, necessary to calculate a parameters of magnetic system, which let to obtain: first, maximum possibles working magnetic flux, and, secondly, desired degree of variability of the working magnetic voltage between of rods of magnetic cores (area of locations for measuring winding).

Keywords: magnetic system, electromagnetic transducer, parallel magnetic rods, magnetic circuit and three-phases current.

In practice often need to dipcide a solve of problems as to find optimal structural and magnetic parameters of electromagnetic transducers of three-phases current, with characteristics (for example, error) must have a minimum value. In this case, as a rule, in addition alley for input values, sets overall dimensions of electromagnetics transducer of three-phases current. Thus, the task: for given values of the operating range and the overall dimensions of the sensor design dimensions of the individual units on which possible obtain maximum consideration characteristics, such as a sensitivity. In this article proposed methodology of calculating of optimal parameters of magnetic system of the electromagnetic transducers of three-phases current with foal parallel rods, which geometric dimensions shown in fig. 1 [1]. On the bases of the given dimensions of magnetic system, necessary to calculate a parameters of magnetic system, which let to obtain: first, maximum possibles working magnetic flux, and, secondly, desired degree of variability of the working magnetic voltage between of rods of magnetic cores (area of locations for measuring winding).

To obtain of maximum working magnetic flux for given values of ampere-winds of the measure winding can be minimum value of the scattering coefficient of the magnetic field. The degree of variability of the magnetic operating voltage along the length of the parallel magnetic rods of electromagnetic transducer of three-phases current (for the locations of measuring winding) can be defined as

$$\varepsilon_U, \% = \left[\left(1 - \frac{1}{ch\beta} \right) / \left(1 + \frac{sh\beta}{\beta ch\beta} \right) \right] 100\% \quad (1)$$

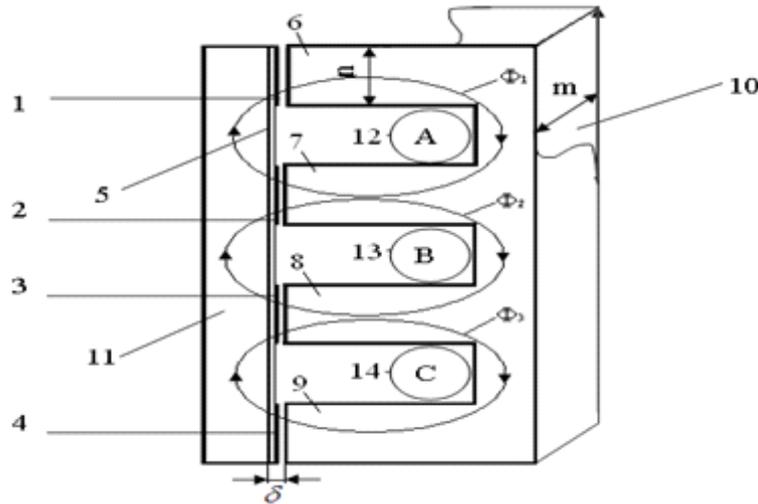


Fig. 1. The magnetic system of electromagnetic transducer:
1, 2, 3 and 4 - measuring secondary windings; 5 - insulation plate;
6, 7, 8 and 9 - four rods and 10 a common magnetic base;
11- core; 12 (phase A), 13 (phase B) and 14 (phase C) - the primary windings.

From equation (1) and graphics (fig.2) shows $\varepsilon_U = f(\mu)$ that ε_U - depends in the air cleans δ (fig. 2). Therefore, to find minimum of error for each chart is quite a challenge and its solution is necessary to consider a optimization. For define to optimization criterion and restrictions need structural dimensions of the magnetic system. The sensitivity's of electromagnetic transducers depends on the phases current K_s , which should be taken as a criterion in the first stage of optimization. Since a significant change in the magnetic voltage in the working area of the magnetic system - one of the main reasons for the low accuracy of electromagnetic transducer of three-phases current, the optimization criterion of the second step need to select ε_U for a reduction of errors (sufficient condition values $\varepsilon_U \leq 5\%$).

Generally, index optimization will be written as:

$$I_i = I(X, Y) \quad (2)$$

Here, vector $X = \{X_1, X_2, \dots, X_n\}$ - the constructive size and design parameters of magnetic system, which not have subject to optimization procedure, vector $Y = \{Y_1, Y_2, \dots, Y_m\}$, which Y_i - the design dimensions and parameters of the magnetic system, defining the optimization process: i.e. δ and μ . Thus, after the optimization procedure results dimensions and parameters should be minimized, K_s and ε_U while maintaining other desired characteristics within specified requirements.

At the same time in the design dimensions and parameters imposed constraints, that are dependent on the application. In particular, for magnetic system with parallel rods can be applied the following linear constraints:

$$5 \cdot 10^{-4} m \leq \delta \leq 2 \cdot 10^{-3} m$$

$$10^2 \leq \mu \leq 1,5 \cdot 10^4$$

$$1 \leq \mu_s \leq 10^2$$

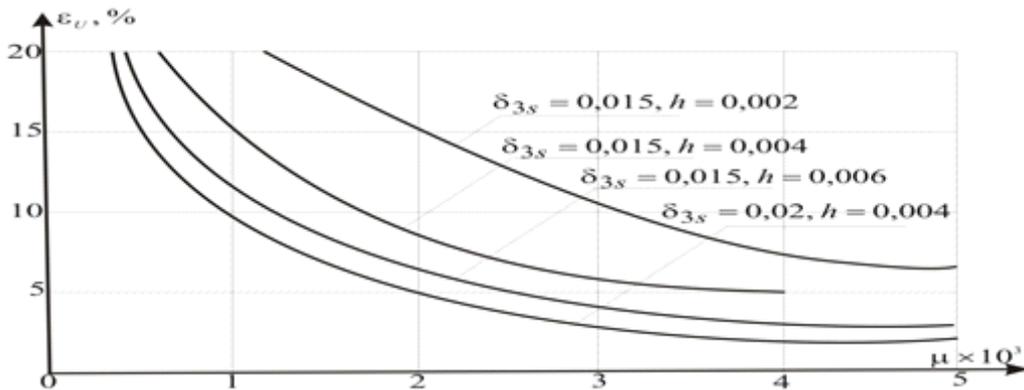


Fig. 2. Dependence of the degree of volatility of all working voltage of the magnetic permeability of steel

Optimality criterion, according to equation (2) is a nonlinear function of the design parameters of magnetic system of the electromagnetic current transducers. On the basis, above criteria of optimization provide error reduction in the conversion of electrical current in the magnetic pull in magnetic circuit of the current transformation of the electromagnetic transducer. The equations of the static characteristic of elementary transformation of the electric current in magnetic structure of the electromagnetic voltage current converter is described as follows:

$$U_\mu = K_{I_3 U_\mu} I_3 \quad U_\mu = wI\theta \quad (3)$$

Given impact of sources of error equation (2) is as follows:

$$U_{\mu\gamma} = (K_{I_3 U_{\mu 0}} + \Delta K_{I_3 U_\mu}) I_3 \quad (4)$$

where $K_{I_3 U_\mu}$ - coefficient of interchain link between the primary electric current I and magnetic intensity (magneto motive force) U_μ , $\Delta K_{I_3 U_\mu}$ - a deviation from the predetermined number of turns, which is almost equal to zero; I_3 - current of the excitation coil - a primary electrical network with errors.

If primary current of electrical current unstabilized, additive some error, i.e.

$$I_{3\gamma} = (I_3 \pm \Delta I_3)(1 + \gamma_{\alpha_R}) \quad (5)$$

and absented from temperature error multiplicative, error component is will equal to zero. Substitute (4) to (5), and neglecting the second any receive.

$$U_{\mu\gamma} = K_{I_3 U_{\mu 0}} I_3 + \Delta K_{I_3 U_\mu} I_3 + K_{I_3 U_{\mu 0}} \Delta I_3 \quad (6)$$

The relative error is determinate from the formula

$$\gamma_{I_3 U_\mu} = \frac{\Delta U_{\mu\gamma} - U_{\mu 0}}{U_{\mu 0}} = \frac{\Delta K_{I_3 U_\mu}}{K_{I_3 U_\mu}} + \frac{\Delta I_3}{I_3} = \gamma_{I_3 U_\mu (\Delta K)} + \gamma_{I_3 U_\mu (\Delta I)} \quad (7)$$

For the component $K_{I_3 U_\mu} \Delta I_3$ affected from external field. In production areas with high-voltage installations external magnetic field for $10^{-5} - 0,5 \cdot 10^{-4}$ Tesla [2]. This area can be induce in the windings of the electromagnetic current transducer e.m.f which equal

$$e = 2\pi f w S_0 B_m,$$

where S_0 - area of winding;

B_m - amplitude of magnetic induction of external field.

Well known [3], what in the magnetic flux density of the electromagnetic current transformers ranging from 0.01 to 1 Tesla. The proportion of external magnetic fields in absence of electromagnetic screen (0.005 - 0.05)%. When the screening body electromagnetic transducer current magnetic induction field inside the screen is determined as:

$$B_{\text{эк}} = B_m e^{-(\delta \sqrt{2\pi f \mu / 2\rho})}$$

where in ρ δ , - respectively and electrical resistance of the material.

The share of external magnetic fields of two magnitude reduced by screening or differential circuits of electromagnetic current transducer [1]. Therefore, we can neglect the effect of errors on the external magnetic field.

Another component of the error, a part of the equation (7) is determined

$$\gamma_{I_3 \Delta U_\mu} = \frac{K_{I_3 U_\mu} \Delta I_3}{K_{I_3 U_\mu} I_3} = \frac{\Delta I_3}{I_3} \quad (8)$$

According to [2], the distribution of elemental electromagnetic conversion error which equal:

$$\gamma_{I_3 U_3 (\Delta I)} = \pm \left[\gamma_{I_3 U_3} + \gamma_{U_3} \left(\left| \frac{U_{\text{эм}}}{U_{\text{эб}}} \right| - 1 \right) \right]$$

When used a constant current, error is negligible, and the voltage stabilization current is determined by equation:

$$\Delta I_3 = I_3 (1 \pm \gamma_{\alpha_{\text{мет}}})$$

As the results of practical research, for the case of aluminum wire, as the field of windings of the electromagnetic current transducer ($\alpha_p = 0,1 \cdot 10^{-4} \text{ grad}^{-1}$) error $\gamma_{I_3 \Delta U_\mu}$ of 0.015% will change at 10°C of temperature [3].

List of references:

1. Amirov S.F., Azimov R.K., Siddikov I.Kh., Khakimov M.Kh., Khushboqov B.X., Sattarov Kh.A. Patent RUz. №04185. The transducers of no symmetry of current to voltage. // Bulletin №6. 2010.
2. Siddikov I.Kh. The Electromagnetic Transducers of Asymmetry of Three-phases Electrical Currents to Voltage. // Universal Journal of Electrical and Electronic Engineering. Horizon Research Publishing Corporation USA. 2015, Vol.3, N5, - p.146 - 148, <http://www.hrpub.org>.
3. Siddikov I.Kh. Anarbaev M. A., Bedritskiy I. M., Khasanov M. Y. The analysis of base characteristics and inaccuracies of electromagnetic transducers current to voltage with flat measuring windings. // European Sciences review, Scientific journal, "East West" Association for Advanced Studies and Higher Education GmbH, Vienna, Austria, 2015, No 7-8, (July-August), p.137-139, <http://www.ew-a.org>.
4. Siddikov I.Kh., Abdulaev A.Kh., Bobojanov M.K. Perfection and development of sensor controls and measuring transducers on a basis of information-energetics model. // WCIS - 2002. Collection of the works. II - World conf. 4-5 June 2002 y. b-Quadrat Verlag, Azerbaijan State Oil Academy, Azerbaijan, Baku, 2002. - p.p. 310 -315.

Section 1. Agrarian sciences.

Рашидова Дилбар Каримовна

Влияние биологически активных полимеров на основе хитозана на содержание жира в семенах масличных культур.....2

Section 2. Economics and Management.

Ван Хуань

Проблемы развития трансграничной электронной торговли в России.....9

Shevchuk Inna Volodymyrivna

Geopolitical location of Japan as a factor of the transformational processes in the field of national economic security.....11

Section 3. Medicine.

Кемелбеков Канатжан Саукханбекович

Main trends of infantile mortality from congenital heart diseases.....13

М. Kurbanazarov

Some factors influencing the clinical course of myopia in children in the region of south Aral sea.....17

Section 4. Pedagogy.

Мухитдинова Фируза Абдурашидовна

Инновационные методы обучения и реформирование системы подготовки юридических кадров.....19

Section 5. Psychology.

Бутаева Умида Алибоевна

Неситуативная ответственность как важный критерий зрелости.....23

Section 6. Science of Art.

Epishin Andrey Sergeevich

«White» vs «gray». Neo- and post-modern tendencies in the architectural discourse of the second half of the 20th century.....25

Section 7. Technical Science.

Amirov Sulton Fayzullaevich

Mathematical model of the magnetic circuit of new magnetoelastic force sensors.....28

Siddikov Ilkhomjon

The sources of errors of electromagnetics transducers.....34