



# The scientific method

**№4 (4)/2017**

## **“The scientific method”**

(Warszawa, Poland)

ISSN 2301 — 2048

**The journal is registered and published in Poland**

**It is published 12 times a year.**

**Articles are accepted in Polish, English, Russian, Ukrainian, German,  
French languages for publication.**

The journal is a batch of articles embracing all fields of modern sciences, enabling our readers seeing a wholesome picture of the development of science. The multi-science format attracts readers from throughout the world, which increases the citation index of each author of our journal.

### **Editorial board:**

**Chief editor:** Mariusz Nowak - Adam Mickiewicz University, Warsaw

### **Managing editor:**

- Dariusz Kowalski - University of Maria Curie-Skłodowska University, Lublin
- Tadeusz Wisniewski - University of Lodz, Lodz
- Mateusz Wójcik - Nicolaus Copernicus University, Torun
- Jerzy Kowalczyk - University of Silesia, Katowice
- Zbigniew Kaminski - University of Gdansk, Gdansk
- Józef Lewandowski - Opole University, Opole
- Adam Zielinski - University of Warmia and Mazury, Olsztyn
- Lukasz Szymanski - Rzeszow University, Rzeszow
- Grzegorz Wozniak - University of Zielona Góra, Green Gora
- Marek Dabrowski - University of Casimir the Great, Bydgoszcz
- Michal Kozlowski - Jan Kochanowski University, Kielce

Ciołka 13, Warszawa, Poland

E-mai: [public@smt-journal.com](mailto:public@smt-journal.com)

Web: [www.smt-journal.com](http://www.smt-journal.com)

# CONTENT

## AGRICULTURAL SCIENCES

- Gunel Seyidzadeh*  
COMPARATIVE EVALUATION  
AGROTECHNOLOGICAL FRAGRANT VARIETY  
OF TOBACCO UNDER NAKHCHIVAN  
AUTONOMOUS REPUBLIC AZERBAIJAN..... 3
- Fatullayev Parviz Ulker*  
THE EFFECT OF DROUGHTS ON  
PRODUCTIVITY COMPONENTS OF DURUM  
WHEAT HYBRIDS (*TRITICUM DURUM* DESF.) IN  
THE CONDITION OF THE NAKHCHIVAN  
AUTONOMOUS REPUBLIC OF  
AZERBAIJAN ..... 7

## HUMANITARIAN SCIENCES

- Vadim Grekhnev*  
SUGGESTION AS GENERAL METHOD OF  
PEOPLE'S DIRECTION..... 13
- Kozhekeyeva B., Mazhiyeva N., Abdresh A.*  
THE NOVEL "GOBSECK" OF HONORE DE  
BALZAC, ITS IMPORTANCE AND ROLE IN  
KAZAKH LITERATURE ..... 16

## NATURAL SCIENCES

- Dzhafarov V.A., Bektashi N.R., Asgerov O.V.,  
Guliyeva A.F., Khanbabayeva G.C., Garibov A.A.,  
Sadigov G.B., Naghiyev J.A., Hasanov T.P.*  
SYNTHESIS AND PROPERTIES OF  
POLYAMINOTHIOCARBAMIDE  
POLYELECTROLITIC COMPLEXES ..... 18
- Hajiyev S.A., Kahramanov S.H., Seyidov I.M.*  
EVALUATION SEMIDESERT AND DRY STEPPE  
LANDSCAPE COMPLEXES IN THE  
NAKHCHIVAN AUTONOMOUS REPUBLIC AND  
THEIR ECOLOGICAL FEATURES ..... 22
- Ryskulbekova L.M.*  
TECHNOLOGICAL WAYS OF DEVELOPMENT  
OF WAYS OF UTILIZATION OF SEWAGE ..... 27
- Etkin VA*  
IMPROVING THE EFFICIENCY OF ANALYSIS  
METHOD OF DIMENSION ..... 32

## SOCIAL SCIENCES

- Kaplinskiy V.V., Glazunova T.V.*  
HOW TO PROVIDE EFFICIENCY OF SELF-  
EDUCATION ..... 37
- Gorskina L.S.*  
SAFE WORKING CONDITIONS AS AN  
ELEMENT OF IMPROVING THE QUALITY OF  
WORKING LIFE IN INDUSTRIAL ENTERPRISES  
OF THE OMSK REGION ..... 41
- Kusplyak G.*  
CONCEPT, COMPOSITION AND STRUCTURE OF  
THE MECHANISMS OF PUBLIC  
ADMINISTRATION ..... 44
- Miroshnichenko E. V.*  
ORGANIZATIONAL-PEDAGOGICAL  
CONDITIONS OF PREVENTIVE MAINTENANCE  
DEVIAN'T BEHAVIOR IN ADOLESCENTS ..... 52
- Omelchak K.O.*  
DEFINITION OF LACK OF THE FINANCIAL AND  
ECONOMIC PUBLIC REGULATION OF THE  
FORMATION OF THE LAND MARKET ..... 54
- Bokhonkova Y.O., Serbin I.V.*  
THE ANTICIPATORY STRATEGY OF THE  
PERSONALITY BEHAVIOR AS A SOCIAL-  
PSYCHOLOGICAL PHENOMENON ..... 59
- Sklyarenko, K. A.*  
THE STRUCTURES OF EVERYDAY LIFE AS A  
DISCURSIVE PRACTICE AND DISPOSITIVE IN  
DISCURSIVE THE CONCEPTS OF  
M.FOUCAULT ..... 63

## TECHNICAL SCIENCES

- Abduraimova Bayan, Imanberdi Abilkair,*  
THE DEVELOPMENT OF LEXICAL ANALYZER  
AND PARSER BASED ON MACHINE WITH  
STACK MEMORY ..... 67
- Boranbaeva Ch.Sh., Kosimov D.I., Davranov K.D.,  
Maksumova D.K., Tashpulatov J.J.,  
Zaynitdinova L.I.*  
PLANT BIOMASS AND ITS MIXTURE WITH  
ORGANIC WASTES AS SUBSTRATE FOR  
BIOGAS PRODUCTION ..... 72
- Shishkina O.O.*  
THE INFLUENCE OF MODIFIED  
NANOCATALYSTS ON THE STRENGTH OF  
CONCRETE..... 76

stack machine. After all these steps, we get a complete shell.

Summarizing, we can say that when we create interpreters for certain computers, we must consider not only specific algorithms of creating of the interpreter, and the architecture of the machine as a whole. In conclusion, we note that the existing interpreters fully correspond with all existing requirements of developers.

#### References

- 1) Schulthess, P; Jacobi, C, ANATOMY OF A SMALL PASCAL COMPILER, IEEE TRANSACTIONS ON SOFTWARE ENGINEERING, ISSN: 0098-5589, 1983, pp.: 185-191
- 2) Viera, M, Swierstra, SD, Compositional compiler construction: Oberon0, Journal Citation Reports, ISSN: 0167-6423, 2015, pp.: 45-56
- 3) Hougaard, OI, Schwartzbach, MI, Askari, H, Type inference for Turbo Pascal, SOFTWARE-CONCEPTS AND TOOLS, ISSN: 0945-8115, 1995, pp.: 160-169
- 4) Cohen, J, Weitzman, A, SOFTWARE TOOLS FOR MICROANALYSIS OF PROGRAMS, SOFTWARE-PRACTICE & EXPERIENCE, ISSN: 0038-0644, 1992, pp.: 777-808

5) Carrasco, Jmg, A NEW LANGUAGE FOR MULTICOMPUTER PROGRAMMING, SIGPLAN NOTICES, ISSN: 0362-1340, 1992, pp.: 47-53

6) Bothe, K, AN ALGORITHMIC INTERFACE STRUCTURE FOR PASCAL COMPILERS, LECTURE NOTES IN COMPUTER SCIENCE, ISSN: 0302-9743, 1985, pp.: 1-6

7) Srinivasan, S, COMPILER DESIGN FOR SETS IN PASCAL, SIGPLAN NOTICES, ISSN: 0362-1340, pp.: 23-24

8) Despeyroux, J, AN ALGEBRAIC SPECIFICATION OF A PASCAL COMPILER, SIGPLAN NOTICES, ISSN: 0362-1340, 1983, pp.: 34-48

9) Faiman, Rn, Kortesoja, Aa, AN OPTIMIZING PASCAL COMPILER, IEEE TRANSACTIONS ON SOFTWARE ENGINEERING, ISSN: 0098-5589, 1980, pp.: 512-519

10) Shimasaki, M, Fukaya, S; Ikeda, K; Kiyono, T, ANALYSIS OF PASCAL PROGRAMS IN COMPILER WRITING, SOFTWARE-PRACTICE & EXPERIENCE, ISSN: 0038-0644, 1980, pp.: 149-157

11) Ammann, U, CODE GENERATION IN A PASCAL COMPILER, SOFTWARE-PRACTICE & EXPERIENCE, ISSN: 0038-0644, 1977, pp.: 391-423

## PLANT BIOMASS AND ITS MIXTURE WITH ORGANIC WASTES AS SUBSTRATE FOR BIOGAS PRODUCTION

**Boranbaeva Ch.Sh.  
Kosimov D.I.  
Davranov K.D.  
Maksumova D.K.  
Tashpulatov J.J.  
Zaynitdinova L.I.**

*Institute of Microbiology, Academy of Sciences of the Republic of Uzbekistan*

#### Abstract

Possibility of utilization of urban leaf fall for biogas production was evaluated. Application of mixture of oak, plane and poplar leaves for biogas production in mesophilic and thermophilic conditions was studied. Qualitative and quantitative composition of microorganisms of dry leaf fall and of biomass after the biogasification process was determined. Study on effect of addition of different proportions of plants biomass (water lettuce - *Pistia stratiotes*) and organic wastes (chicken manure) on biogas production were conducted.

**Keywords:** biogas, leaf fall, chicken manure, water lettuce, anaerobic microorganisms, methanogenesis, microbiological analysis.

#### Introduction

Traditional power engineering is based on fossil fuel, the deposits of which are not endless. Attractiveness of biogas application is stipulated by the fact that it may be easily produced from livestock manure and plant wastes [1, p.78-85]. At the same time, utilization of urban plants wastes, including leaf fall and so on, is ecologically important task in large cities. It is known that natural processes of plant biomass degradation in soil are quite slow and may take, depending on environmental conditions, more than two years [2, p. 35-36]. Leaves of trees belongs to category of natural leaf fall observed in forests, as well as in urban parks and orchards, of temperate zone. In the natural conditions

leaves and needles of trees fallen on soil surface are gradually digested by the complex of soil borne living creatures (insects, worms, microorganisms, protozoa and so on) and form humus, promoting enhancement of soil structure and fertility and protecting sprouts and roots of young trees from winterkill. The quantity of the leaf fall is estimated as much as 54-78% in coniferous forest and 83% in deciduous forest out of 2.51-7.76 tons per hectare of annual biomass fall [3, p. 133; 4, p. 771; 5, p. 234]. At the same time, the total biomass of forest plants in the world is estimated as 1.5 billion of tons of dry matter, which is equal to 80% of weigh of aggregate biomass on Earth [6, p. 233]. The quantity of leaf fall of arboreal and shrubby

plants is considerable in managed plantations as well. In urban conditions, where, as opposed to natural forest, many natural leaf fall digesters are absent and where exist certain standards of territory maintenance, there is strong necessity to follow a number of rules, like mandatory removal of leaf fall from sidewalks and road surface, mandatory disposal of and so on. Whereas this disposal of may be replaced by biomass transformation in the process of methanogenesis. Biomass of urban leaf fall is one of renewable sources and organization of its fuller and efficient utilization becomes more important.

One of attractive plant wastes is biomass of higher water plants, such as water lettuce (*Pistia stratiotes*) and water hyacinth (*Eichhornia crassipes*), which are used on a number of sewage cleansing facilities and is accumulated in large quantities [7, p. 37; 8, p. 353]. Accumulation of urban leaf fall in waste fields results in considerable expenses, while its incineration leads to air pollution and thus prohibited. Conversion of the

plant biomass into biogas may be one of the solutions of the utilization problem [9, p. 131].

The aim of work was to study possibility of application of urban leaf fall in mixture with plant biomass and chicken manure for biogas production.

#### Materials and methods

Urban leaf fall in a mixture of leaves of oak (*Quercus robur*), plane (*Platanus orientalis*) and poplar (*Populus alba*) was used as substrate for biogas production. Biomass of water lettuce (*Pistia stratiotes*) and chicken manure were used as well in the study.

Methanogenic association of microorganisms isolated from the active silt of sewage cleansing facilities (Khorezm city) was used for the fermentation of the substrate. pH of the medium was 7.0. Experiments were conducted in anaerobic chambers (figure 1) in mesophilic ( $t=30-40^{\circ}\text{C}$ ) and thermophilic ( $t=50-55^{\circ}\text{C}$ ) modes.



Figure 1. Laboratory methane tank (anaerobic chamber)

Nutrient media described in a guidebook [10, p. 113-114] were used for microorganisms' isolation from the initial substrate and from biomass after the methanogenesis process. Microbiological analysis was conducted using method of serial dilution with further cultivation on solid and liquid nutrient media.

#### Results and discussion

Microbiological analysis of dried biomass of urban leaf fall revealed presence of different forms of microorganisms in it. Dominating forms were microorganisms growing on beef extract; ammonifying spore forming microorganisms were isolated in large quantities. Heterotrophic denitrifying and cellulose degrading microorganisms, both aerobic and facultatively anaerobic, were revealed in ecologically considerable amounts (table 1).

It is known that biomass degradation takes place under action of three types of bacteria. Subsequent

bacteria in the food chain consume waste products of preceding bacteria, thus, there observed change of biocenoses or development of microorganisms' successions. It is necessary to note that in biogas production process participate not only microorganisms-methanogens but other microorganisms as well that precede methanogenesis. Under action of these microorganisms insoluble organic matter present in biomass start to disintegrate on simple organic compounds. This stage is called hydrolysis and it results in accumulation of amino acids, sugars and fatty acids.

Hydrolytic oxidation of the part of simple organic compounds under action of heteroacetogenic bacteria takes place, which results in formation of acetate, carbon dioxide and free hydrogen. The rest of organic compounds together with acetate produced at the second stage form simple organic acids.

Table 1

## Microbiological analysis of samples

Sample	Amount of microorganisms, CPU/g						
	Beef-peptone agar	Ammonifying	Denitrifying	Sulphate-reducing	Cellulose-degrading	Anaerobic cellulose-degrading bacteria	Methanogenic bacteria
Initial biomass with active silt and nutrient medium	$4.5 \times 10^6$	$2.5 \times 10^3$	$2.5 \times 10^3$	$2.5 \times 10^4$	$2.5 \times 10^4$	$2.5 \times 10^3$	$6.0 \times 10^1$
After the 3 <sup>rd</sup> stage of methanogenesis	$1.9 \times 10^3$	$2.55 \times 10^3$	$2.5 \times 10^2$	$6.0 \times 10^3$	-	$6.0 \times 10^4$	$6.0 \times 10^4$

Analysis of microorganisms' development on further stages of acidogenesis and acetogenesis reveals that at increased anaerobiosis the decrease of amount of saprophytes, the decrease of amount of aerobic cellulose degrading microorganisms takes place with subsequent increase of anaerobic cellulose degrading bacteria, mainly representing genus *Clostridium*. The final microbiological analysis of obtained mass was conducted after completion of the methanogenesis process. It was established that number of all studied microorganisms decreased by 2-3 orders (table 1). The last stage of methanogenesis is represented by ecologically significant numbers of methanogenic microorganisms – bacilli, sarcinas, cocci. Methanogenic microorganisms are mainly represented by *Methanosarcina*, *Methanococcus*, *Methanobacterium*, *Methanomicrobium* species.

Biomethanogenesis is complex microbiological process, in which organic matter is degraded to carbon dioxide and methane in anaerobic conditions. Almost all compounds of natural origin and considerable amount of xenobiotics of organic origin are liable to microbial anaerobic degradation.

Earlier we established possibility of application of urban leaf fall (intact) for biogas production. The maximum pressure was observed on 20<sup>th</sup> day while methane production was observed starting from the 3<sup>rd</sup> day with subsequent increase of gas yield up to 51%. Addition of active silt and organic wastes considerably intensified the methanogenesis process. Biogas yield was observed starting from the first day, whereas maximum methane content was observed starting from 10<sup>th</sup> days reaching 55.3% [11, p. 107-108].

It is known that depending on temperature of the process methanogenic bacteria are divided on mesophilic (optimal temperature 30-40°C) and thermophilic (50-60°C) one. In general, thermophilic process of methanogenesis is more intensive and the substrate becomes almost totally helminth- and pathogen-free in these conditions of anaerobic transformation of waste. Thermophilic methanogens possess higher velocity of development and are capable to conduct intensive process of methanogenesis, and that is why are considered as most promising objects for application in biotechnology. Thermophilic methane-producing bacteria *Methanobacterium* and *Methanosarcina* are the main components of thermophilic anaerobic community conducting destruction of organic matter to methane.

It was established that in the thermophilic process indices of pressure considerably change, volume of produced biogas increases and duration of the process changes as well (figure 2, 3).

Comparative analysis of the dynamics of methanogenesis process in thermophilic and mesophilic conditions established high degree of intensity of biogas formation in thermophilic conditions (figure 4).

Fresh chicken manure classified as the second-class toxic industrial waste because it usually contains a number of pathogenic bacteria and large quantities of nitrogen (2.69%). Its utilization may create certain problems. At the same time, it may be used in the process of biogasification. That is why, the next stage of study was application of chicken manure with mixture of different plant biomass in the process of methanogenesis.

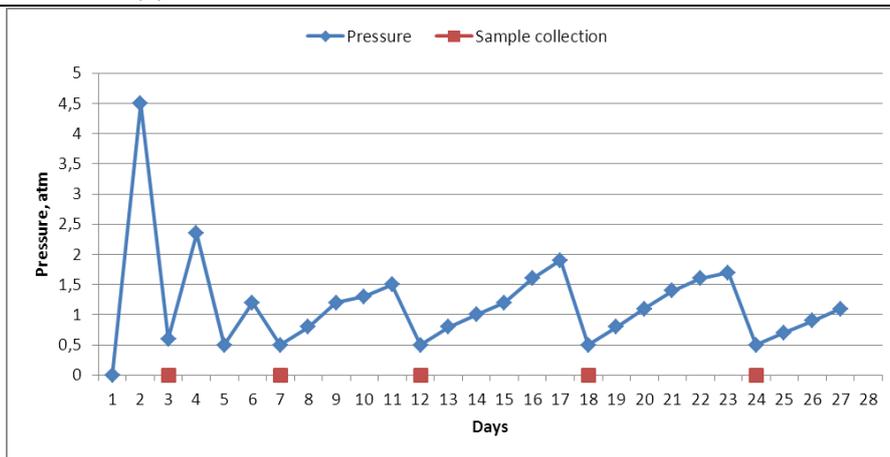


Figure 2. Indices of methanogenesis process at t 30-35°C

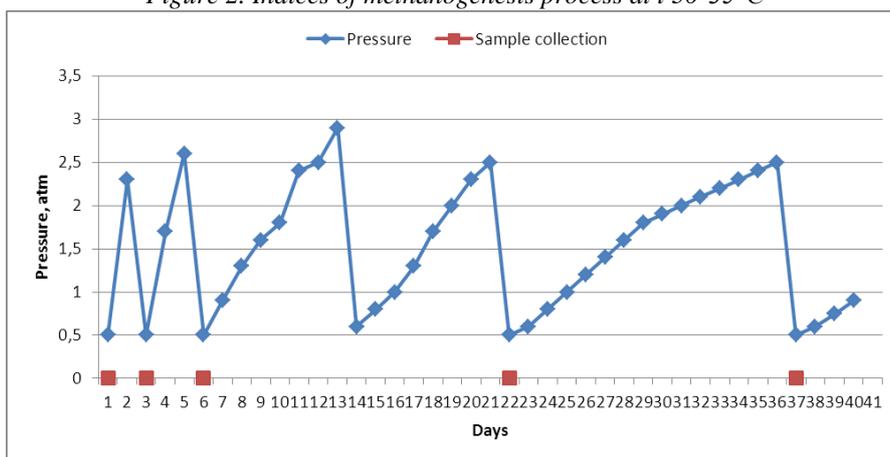


Figure 3. Indices of methanogenesis process at t 55°C

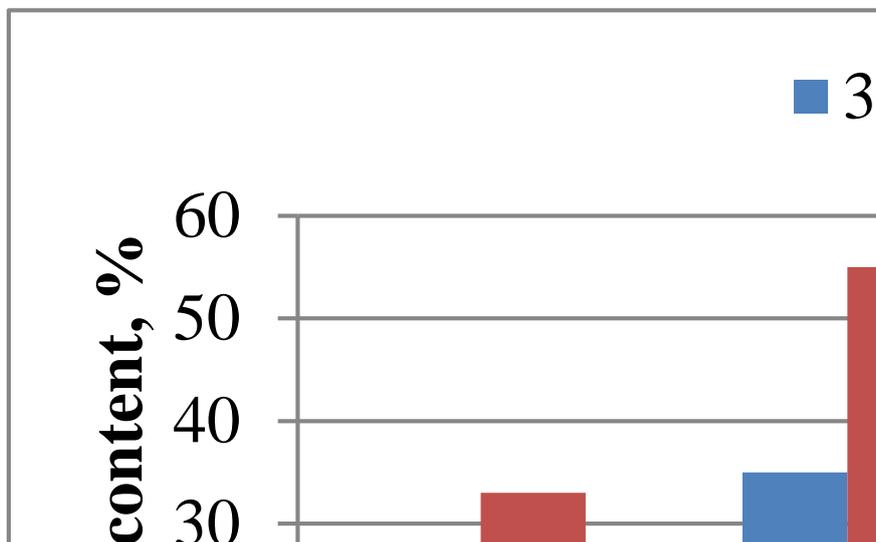


Figure 4. Methane yield at different temperature

As result of conducted study, it was established that at fermentation of urban leaf fall with chicken manure and grinded biomass of higher water plants the biogas yield increases in thermophilic conditions (table 2). Already in the first day, the pressure in working anaerobic chamber raises up to 1.5-2.3 atm, but methane content is considerably low. On 10<sup>th</sup> day methane content reaches 53%, after which activity

inconsiderably decreases. But, the process of methane production lasts till the end of experiment. Increase of CO<sub>2</sub> portion in composition of biogas mixture in thermophilic conditions was observed, which is linked with the fact that at high temperatures carbon dioxide dissolved in substrate transits to the gas phase (biogas).

Table 2

Chromatography analysis of samples (%)					
Sample	Day	CH <sub>4</sub>	N <sub>2</sub>	CO <sub>2</sub>	other
Urban leaf fall with mixed substrate of chicken manure and water lettuce, 55°C	2	31.92	3.0	49.17	<10
	6	39.29	2.8	47.12	<10
	10	53.0	2.0	34.47	<10
	16	56.1	-	33.68	<10
Urban leaf fall with mixed substrate of chicken manure and water lettuce, 35°C	2	-	-	47.35	<10
	6	36.63	5.6	37.79	<10
	10	53.11	4.8	33.89	<10
	16	54.28	1.2	28.14	<10

### Conclusion

Biogas may be successfully produced from plant wastes, in particular from mixture of urban leaf fall and waste biomass of higher water plants. Our study on biogas production in thermophilic and mesophilic conditions established some opportunities for application of temperature factor for regulation of the methanogenesis process.

Application of different mixtures of organic matter and plant biomass revealed that application of both urban leaf fall and higher water plants biomass with addition of organic waste (like chicken manure) may be quite efficient at certain conditions. It may promote to facilitation of the process of utilization of chicken manure and urban leaf fall into biogas production. Utilization of such waste promotes to solution of power, ecologic and social issues on both community level and state level.

### References

- [1] Biogas guidebook. From receipt to use. Braunschweig: Johann Heinrich von Thünen-Institut. 2010.
- [2] Marinenko E.E. Basics of production and use of biofuel for solution of issues of energy saving and environment preservation in housing and agriculture: textbook. Volgograd: VolgGASA, 2003.
- [3] Grodzin'skiy A.M. Basics of chemical interaction between plants. Kyiv: Naukova dumka, 1973.
- [4] Gosz J.R., Likens G.E., Bormann F.R. Nutrient content of litter fall on the Hubbard Brook exper-

imental forest, New Hampshire // Ecology. 53. №5. 1972. P.769-784.

[5] Kawahara T. The return of nutrients with litter fall in the forest ecosystems. II. The amount of organic matter and nutrients // Journ. Jap. Forest Soc. 53. №8. 1971. P. 231-238.

[6] Kocman J., Syrovatka K. Economic Problems Regarding the Production and Utilization of Forest Chips in the Czech Socialist Republic // Cechosl. 13. 1983. P. 231-250.

[7] Tarushkina Yu.A. Higher water plants for sewage cleansing // Ecology and industry of Russia. 2006. №5. P.36-39.

[8] Kutliev J.K., Mavlyanova M.I., Urinova A.A., Sharifov M. Biotechnology of sewage cleansing // Almaty. KazNU Archives. Ecology series. №1/2 (40). 2014. P. 352-355.

[9] Aripov T.F., Tashpulatov J.J., Kukanova S.I., Zaynitdinova L.I., Verushkina O.A. Methane production from waste of water plants biomass (laboratory experiments) // Baku. Archive of Institute of Microbiology of the Azerbaijan Academy of Sciences. 2012. v.10. №1. P. 130-133.

[10] Netrusov A.I. Microbiology guidebook. Moscow, Akademiya, 2005.

[11] Tashpulatov J.J., Aripov T.F., Kukanova S.I., Zaynitdinova L.I. Phytomass of urban leaf fall as source for biofuel production // Microbiology and virology. №2 (5). 2014. P.104-110.

## THE INFLUENCE OF MODIFIED NANOCATALYSTS ON THE STRENGTH OF CONCRETE

Shishkina O.O.

Kriviy Rih National University

## ВПЛИВ МОДИФІКОВАНОГО НАНОКАТАЛІЗАТОРА НА МІЦНІСТЬ БЕТОНУ

Шишкіна О.О.

Криворізький національний університет  
м. Кривий Ріг, Україна

### Abstract

Carried out physical-mechanical studies of nanostructured concrete, which showed that modification of micellar catalyst, which is used as nanoparticles, namely micelles of surface-active substances, due to the introduction of conventional surface-active substances, increases the rate of the formation strength, as the cement stone